



## Quiet Qurl® 65/075 Products

Quiet Qurl® 65/075 products are ultra high-performance sound mats.

Quiet Qurl® 65/075 has extra thickness and is used with the extra mass of a 1.5" gypsum concrete (monofilament-reinforced) underlayment. This system is the perfect solution for rehab loft projects.


Overall, Quiet Qurl® 65/075 can add 35 points in IIC over concrete, and will perform 6 to 8 points higher than a quarter-inch mat.

### Benefits

- ✓ A perfect solution for retrofit application, in wood beam construction and poured concrete where noise issues are great
- ✓ Random oriented monofilament design for the greatest resilience and highest noise control available
- ✓ 2.25" (5.63-cm) profile is perfect for high ceiling loft look in which height is not an issue
- ✓ Rolls out flat for ease of installation



*Quiet Qurl® 65/075 is 0.75 inches thick (19 mm) and sold in 50-foot (200-sq.-ft.) rolls*

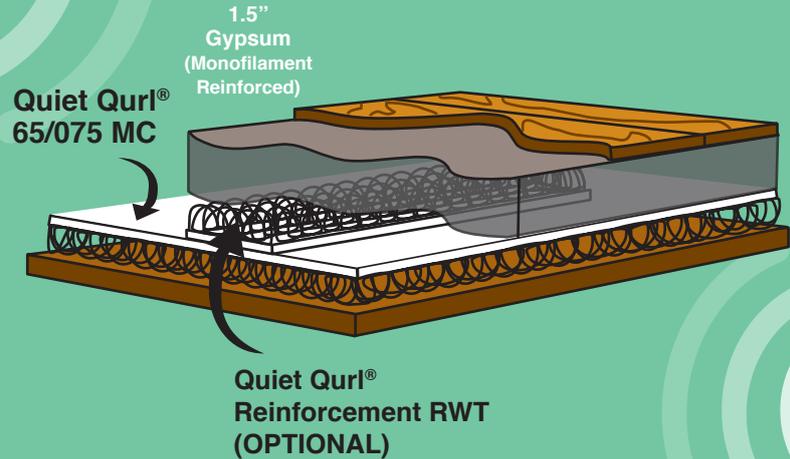


- ✓ Nylon polymer core of tangled monofilaments
- ✓ Fabric options include: white moisture control, reinforced, or muffling technology
- ✓ Class A fire-rated

*Quiet Qurl® Reinforcement RWT is a 0.375-inch (9-mm), random-filament, geometric patterned core crack suppression mat used to reinforce gypsum concrete and many types of concrete in thin applications.*



Patent No.: US 7,096,630  
& US 8,146,310

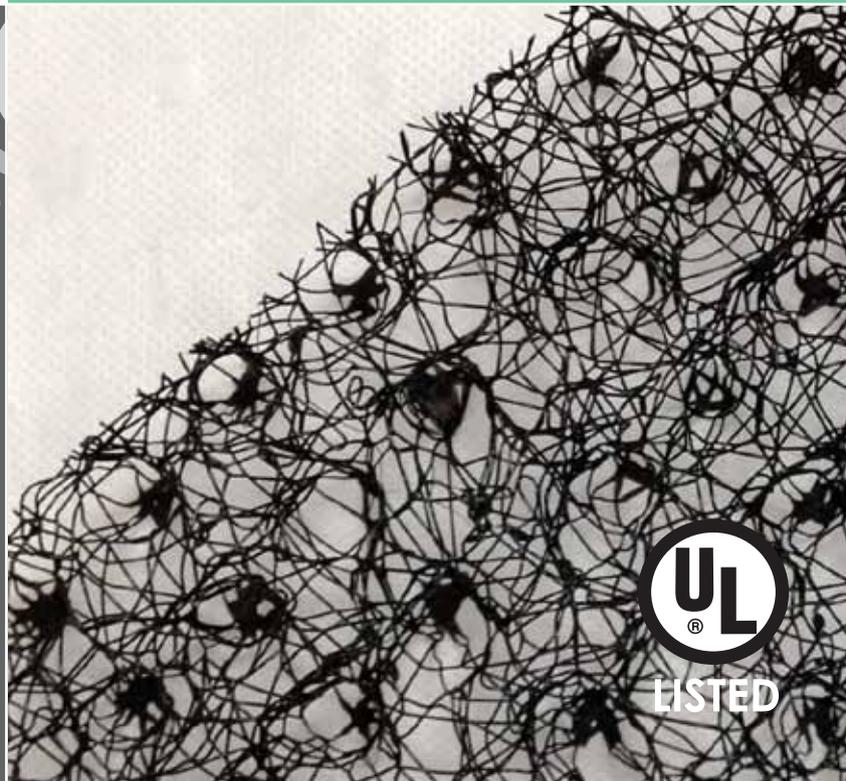



## Quiet Qurl® 65/075 Products

Product	Thickness	Length	Area
Quiet Qurl 65/075 MC	0.75 in./19.0 mm	50 ft.	200 sq. ft.
Quiet Qurl 65/075 N MT	0.75 in./19.0 mm	50 ft.	200 sq. ft.
Quiet Qurl 65/075 N RF	0.75 in./19.0 mm	50 ft.	200 sq. ft.
Quiet Qurl 65/075 RF MT	0.75 in./19.0 mm	50 ft.	200 sq. ft.
Quiet Qurl Reinforcement RWT	0.375 in./9.0 mm	75 ft.	300 sq. ft.

### Accessory Product

Quiet Qurl Perimeter Isolation	0.125 in./3.0 mm	550 ft.	183.3 sq. ft.
--------------------------------	------------------	---------	---------------

For a complete list of all our products, please contact KBP, or visit our website at [www.KeeneBuilding.com](http://www.KeeneBuilding.com)

## Applications

- ✓ Retrofit applications of old buildings – especially historic tax credit apartments and future condominiums
- ✓ Loft conversions
- ✓ When a resilient ceiling is installed
- ✓ With hard surfaces: concrete, stone, tile, vinyl and hardwood finished surfaces
- ✓ With topping layers, such as gypsum concretes, lightweight concrete, mortar beds and plywood
- ✓ When a ceiling construction is not an option
- ✓ For new construction, the ultra high – performance that condominium developers desire

Note: In all retrofit and loft conversion applications performance should be proven with on-site field tests. No floor/ceiling performance on prior projects can replicate performance on another specific project.

## Quiet Qurl® Reinforcement RWT

Quiet Qurl® Reinforcement RWT 040 MC N is a 0.375-inch (9-mm), random-filament, geometric patterned core crack suppression mat used to reinforce gypsum concrete and many types of concrete in thin applications.

The 3/8" (9-mm) thickness is perfect to provide the added strength needed in the assembly when the gypsum concrete is less than traditional depth.

The monofilament helps cracks remain in place so that a tile, marble, stone or vinyl surface can be successfully applied. Quiet Qurl® is a Class A fire-rated product.

QUIET QURL is a component in an overall floor/ceiling assembly. Its performance is affected by every other component and the likelihood of achieving code compliance is contingent upon many other trades including framers, plumbers, drywall contractors to name a few. Developers and general contractors are responsible for building properly and testing field performance as soon as possible in order to assure the reliability of the project.

WARNING: Laboratory tests are not a guarantee of field performance because of the issues noted above and many other design errors that may occur. Please consult a professional acoustical consultant to assure plans are proper and that the floor/ceiling assembly can perform to expectations.



P.O. Box 241353

Mayfield Heights, OH 44124

877 | 514 | 5336

Info@KeeneBuilding.com

P 440 | 605 | 1020

[www.KeeneBuilding.com](http://www.KeeneBuilding.com)

F 440 | 605 | 1120