



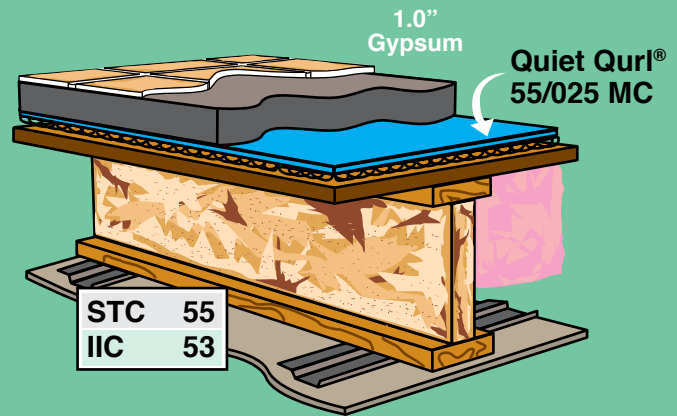

Quiet Qurl® 55/025 Products

Code driven noise requirements have placed a financial burden on multi-family projects. In this day of litigious practices, even developers of apartments have risks from noise complaints. Quiet Qurl® 55/025 was designed to provide code complaint noise reduction with most typical finished floors and joist assemblies. When used with a 1.0" gypsum concrete pour, this low-profile system can achieve code STC and IIC needs for the new UBC. Quiet Qurl® 55/025 is available with a moisture-control fabric, fiberglass fabric, or the new LEED® compliant and enhanced noise control MT version. Installed coast-to-coast and for some of the biggest names in apartment and condo development, Quiet Qurl® 55/025 is the right product in noise attenuation.

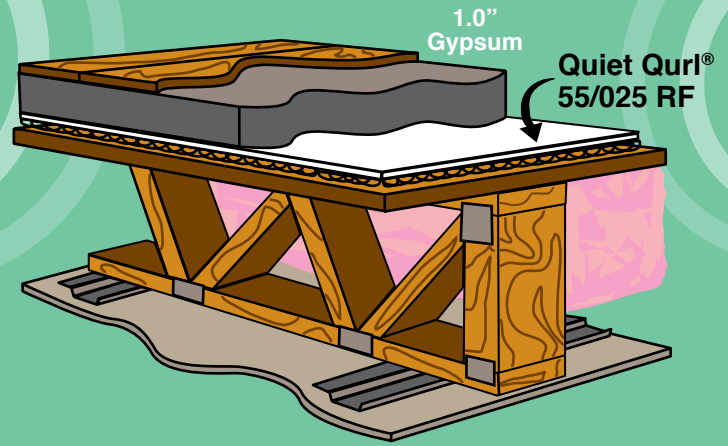

- ✓ Polypropylene polymer core of tangled monofilaments
- ✓ Polypropylene fabric in white non-woven or blue moisture control and fiberglass options
- ✓ Class A fire-rated
- ✓ Robinson Wheel tested with the Tile Council of America – “extra heavy-duty” rating
- ✓ UL-listed

Benefits

- ✓ Excellent performance at reducing sound in low and high frequencies
- ✓ Performance in wood frame construction and concrete structures
- ✓ “U”-groove design for flat installation
- ✓ Cost-effective choice for achieving code with multiple hard-surface finishes
- ✓ Code-compliant solutions in wood frame construction with “I” joists, open web joists and nominal lumber construction



Quiet Qurl® 55/025 MC is 0.25 inches thick (6 mm) and sold in 100-foot rolls (400 sq. ft.)





Quiet Qurl® 55/025 Products

Product	Thickness	Length	Area	Packaging	Roll Weight
Quiet Qurl 55/025 MC	0.25 in./6.0 mm	100 ft.	400 sq. ft.	22x22x48 in.	50 lbs.
Quiet Qurl 55/025 RF	0.25 in./6.0 mm	100 ft.	400 sq. ft.	22x22x48 in.	50 lbs.
Quiet Qurl 55/025 MC MT	0.25 in./6.0 mm	50 ft.	200 sq. ft.	22x22x48 in.	29 lbs.
Quiet Qurl 60/040 MC MT	0.375 in./9.0 mm	50 ft.	200 sq. ft.	24x24x48 in.	48 lbs.
Quiet Qurl 65/075 MC MT	0.75 in./19.0 mm	25 ft.	100 sq. ft.	23x23x48 in.	29 lbs.

Accessory Product

Quiet Qurl Perimeter Isolation	0.125 in./3.0 mm	550 ft.	183.3 sq. ft.	30x30x4 in.	5 lbs.
-----------------------------------	------------------	---------	---------------	-------------	--------

For a complete list of all our products, please contact KBP, or visit our website at www.KeeneBuilding.com

Applications

- ✓ Multi-family construction: apartments and condominiums
- ✓ Radiant-heated flooring when pumped with lightweight concrete or gypsum
- ✓ With hard surfaces: concrete, stone, tile, vinyl and hardwood
- ✓ With topping layers, such as FIRM-FILL gypsum concretes, lightweight concrete, mortar beds and plywood
- ✓ With many types of subfloors (with or without ceiling assemblies, many types of wood structural joists and ceilings), and still achieves an IIC of 50 or greater
- ✓ Helps to achieve an STC level of 50 or greater with many types of subfloors

Quiet Qurl® Perimeter Isolation

Quiet Qurl® Perimeter Isolation is an accessory to the Quiet Qurl® sound control system designed to limit flanking sound.

Flanking paths from the floor to the wall are limited by this simple material. The void space is filled so that airborne sound cannot flank either.

The material is 0.125 inches (3.0 mm) thick and 4.0 inches (10 cm) in width. One side has a sticky film attached, and the seam from the wall to the floor is made in a more simple manner, often without taping.

Installed after the Quiet Qurl® sound mat and overlapped in an “L” shape for added safety in preventing underlayment leaks.



P.O. Box 241353

Mayfield Heights, OH 44124

Info@KeeneBuilding.com

www.KeeneBuilding.com

877 | 514 | 5336

P 440 | 605 | 1020

F 440 | 605 | 1120