




Quiet Qurl® 65/075 Products

Quiet Qurl® 65/075 products are ultra high-performance sound mats.

Quiet Qurl® 65/075 has extra thickness and is used with the extra mass of a 1.5" gypsum concrete (monofilament-reinforced) underlayment. This system is the perfect solution for rehab loft projects.

Overall, Quiet Qurl® 65/075 can add 35 points in IIC over concrete, and will perform 6 to 8 points higher than a quarter-inch mat.

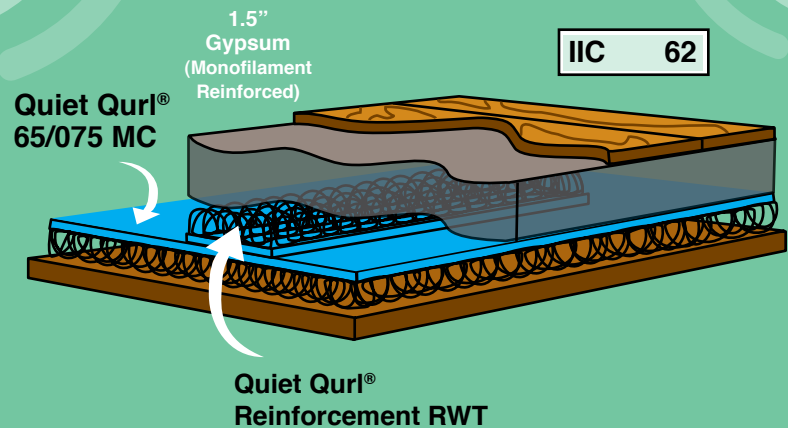

- ✓ Polypropylene polymer core of tangled monofilaments
- ✓ Polypropylene fabric in white non-woven or blue moisture control tri-laminate options
- ✓ Class A fire-rated

Quiet Qurl® Reinforcement RWT is a 0.375-inch (9-mm), random-filament, geometric patterned core crack suppression mat used to reinforce gypsum concrete and many types of concrete in thin applications.


Benefits

- ✓ A perfect solution for retrofit application, in wood beam construction and poured concrete where noise issues are great
- ✓ Random oriented monofilament design for the greatest resilience and highest noise control available
- ✓ 2.25" (5.63-cm) profile is perfect for high ceiling loft look in which height is not an issue
- ✓ Zero moisture absorption in hydrophobic polymer core; no expansion and contraction with humidity



Quiet Qurl® 65/075 is 0.75 inches thick (19 mm) and sold in 50-foot (200-sq.-ft.) rolls

Photo: Meridian Street Lofts, Indianapolis, IN – Quiet Qurl® 65/075 MC

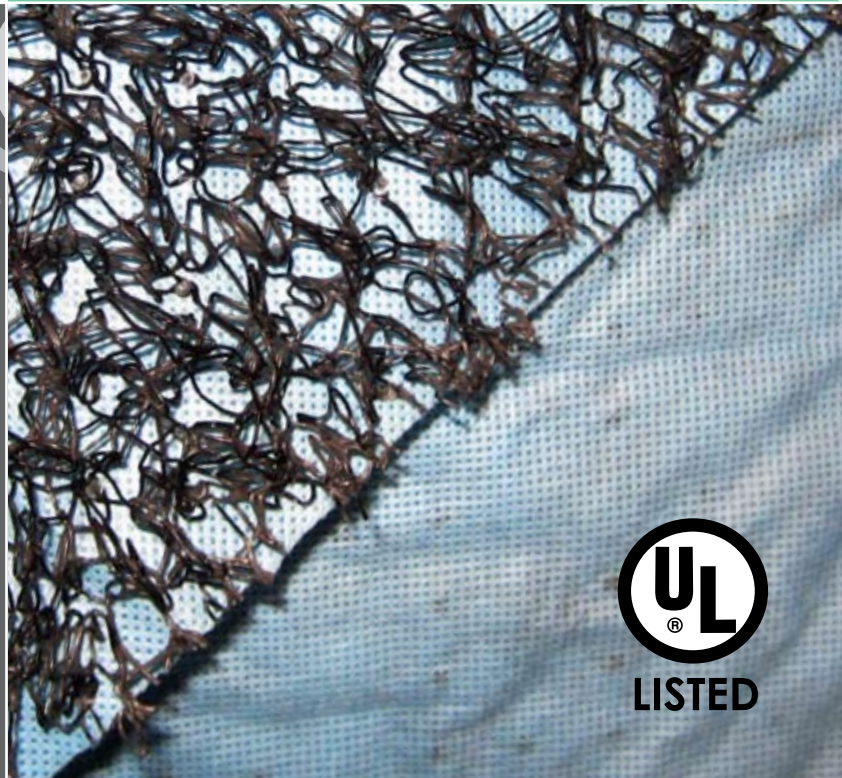



Quiet Qurl® 65/075 Products

| Product | Thickness | Length | Area | Packaging | Roll Weight |
|------------------------------|------------------|--------|-------------|--------------|-------------|
| Quiet Qurl 65/075 MC | 0.75 in./19.0 mm | 50 ft. | 200 sq. ft. | 23x23x48 in. | 29 lbs. |
| Quiet Qurl Reinforcement RWT | 0.375 in./9.0 mm | 75 ft. | 300 sq. ft. | 19x19x48 in. | 38 lbs. |

Accessory Product

| | | | | | |
|--------------------------------|------------------|---------|---------------|-------------|--------|
| Quiet Qurl Perimeter Isolation | 0.125 in./3.0 mm | 550 ft. | 183.3 sq. ft. | 30x30x4 in. | 5 lbs. |
|--------------------------------|------------------|---------|---------------|-------------|--------|

For a complete list of all our products, please contact KBP, or visit our website at www.KeeneBuilding.com

Applications

- ✓ Retrofit applications of old buildings – especially historic tax credit apartments and future condominiums
- ✓ Loft conversions
- ✓ With hard surfaces: concrete, stone, tile, vinyl and hardwood finished surfaces
- ✓ With topping layers, such as FIRM-FILL gypsum concretes, lightweight concrete, mortar beds and plywood
- ✓ When a ceiling construction is not an option
- ✓ For new construction, the ultra high – performance that condominium developers desire

Quiet Qurl® Reinforcement RWT

Quiet Qurl® Reinforcement RWT 040 MC N is a 0.375-inch (9-mm), random-filament, geometric patterned core crack suppression mat used to reinforce gypsum concrete and many types of concrete in thin applications.

The 3/8" (9-mm) thickness is perfect to provide the added strength needed in the assembly when the gypsum concrete is less than traditional depth.

The monofilament helps cracks remain in place so that a tile, marble, stone or vinyl surface can be successfully applied. Quiet Qurl® is a Class A fire-rated product.



P.O. Box 241353

Mayfield Heights, OH 44124

Info@KeeneBuilding.com

www.KeeneBuilding.com

877 | 514 | 5336

P 440 | 605 | 1020

F 440 | 605 | 1120